

4-Bolt Head Spiral Gauges



Applications

The 8684 Top Mount Model 4-Bolt Head Medium Duty Spiral Gauge is designed for use in measuring liquid levels in gasoline, diesel fuel, biodiesel, hydraulic and lubricating oils where space restrictions prevent the use of a swing-arm style mechanical gauge. It is ideal for medium duty construction & agriculture, lawn & garden, and recreational vehicle applications.

General Information & Features


- Field Replacement Fractional Dial
- Solid Construction Head, No-Leakage Path to Dial.

The 4-Bolt Head mounting of the 8684 Spiral Gauge allows a tight seal that restricts vapor loss. The 8684 4-Bolt Spiral Gauge is designed for top mounting and has an easy to read fractional dial. It is available in lengths from 6 to 20 inches.

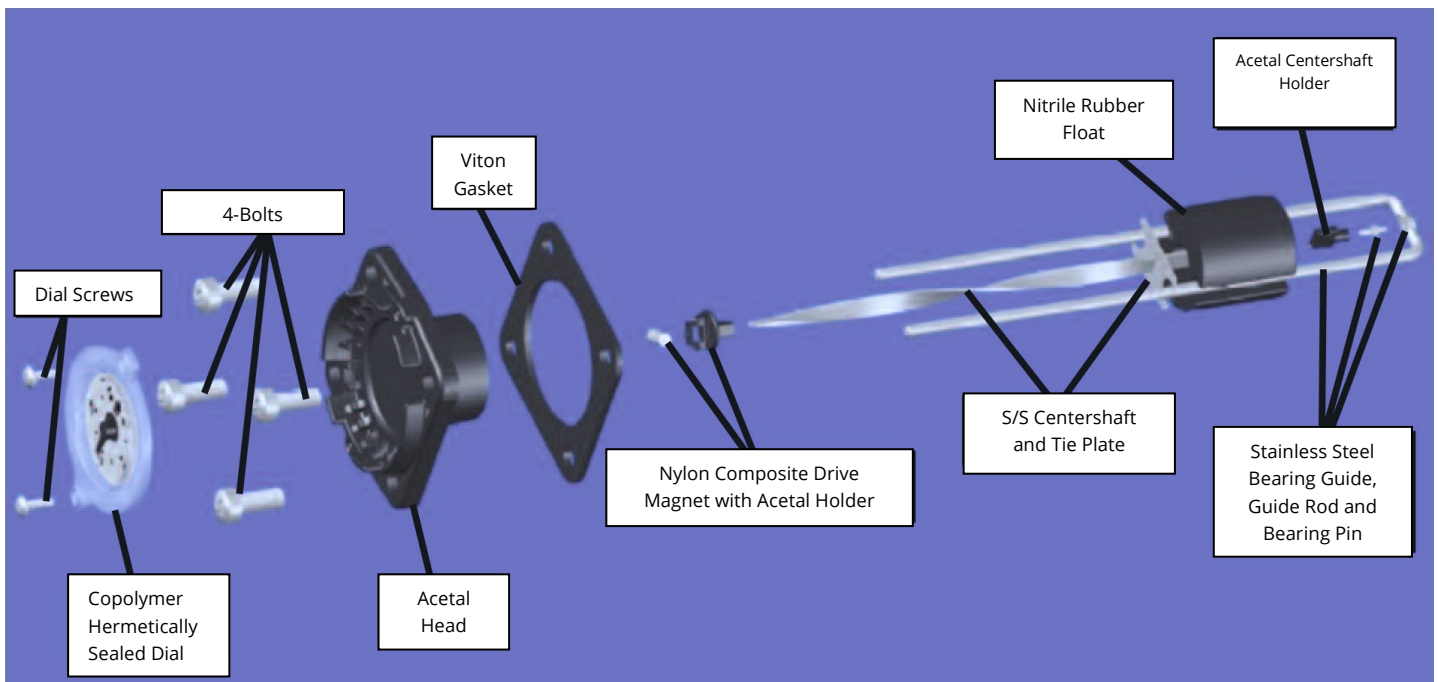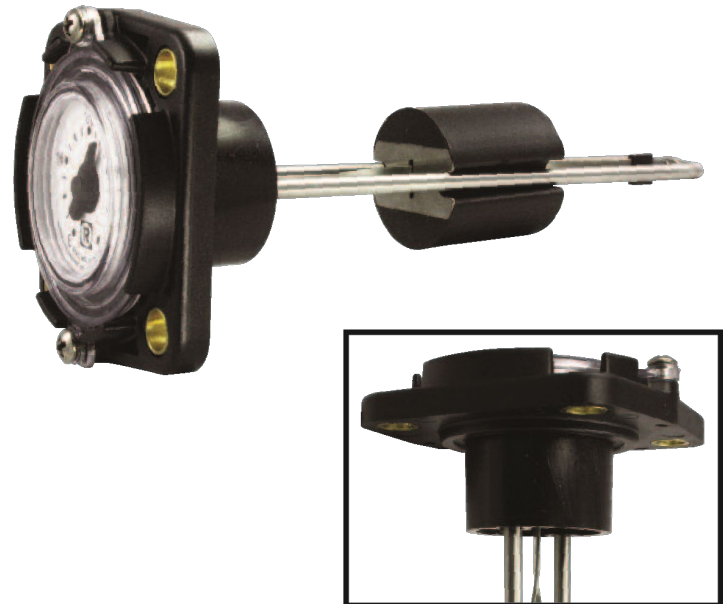

E. & O.E. ©Rochester Sensors.

Since the suitability of these products depends upon a wide range of factors not in our control, Rochester Sensors expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Rochester Sensors reserves the right to make material changes, and or technical changes without notification.

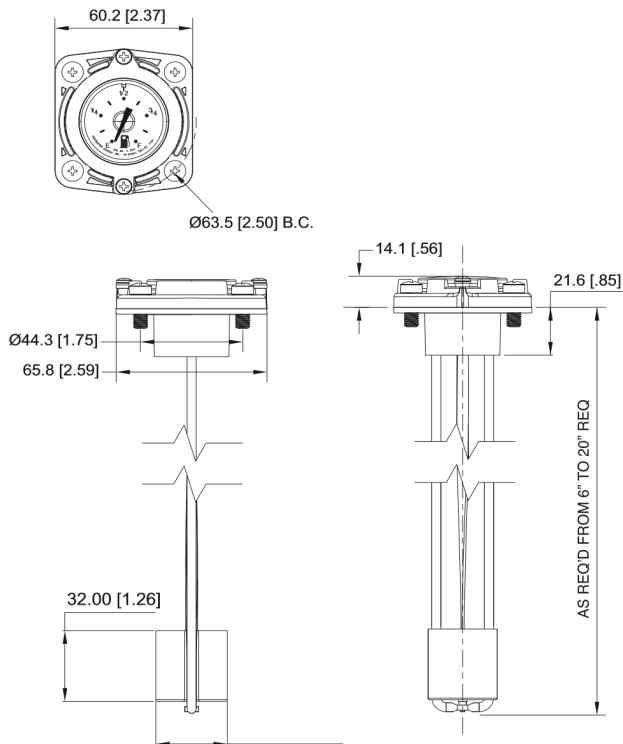

General Specifications*

Mounting

Designed for top-mounting only.

Accuracy

Accuracy depends upon gauge sizing. Direct read dials $\pm 7\%$. Accuracy may be less depending upon tank shape. Accuracy may be less if tank is not level. This gauge is not to be used for filling. All accuracy estimates are expressed as a percent of full scale.

Temperature Range

Standard operating range is -40°F to 158°F , -40°C to 70°C .

Shock & Vibration

Suitable for mobile service applications.

Tank Pressure

0 to 14.5 psig [0 – 1.0 Bar] maximum.

Tank Opening Details

Four 0-25"-28 bolt holes on 2.5" bolt circle, $\text{Ø}1.750$ center hole.

Note: for installation instructions see MS-501/502.


When ordering, specify:

1. Gauge model number.
2. Tank depth.
3. Riser Height, if any.

*Materials and specifications are subject to change without notice.

Pressure ratings subject to change due to temperature and other environmental considerations.

View of Magnetic Coupling

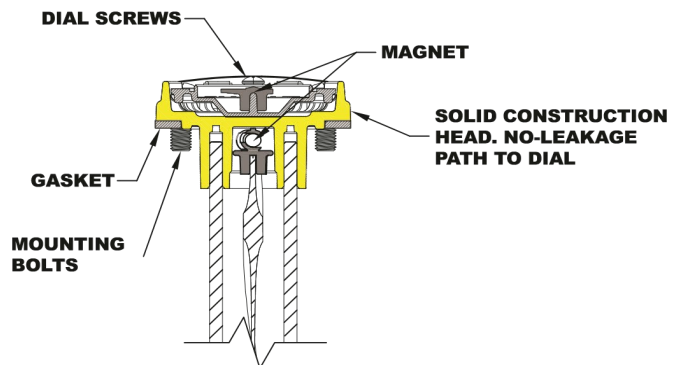

The Rochester magnetic liquid level gauge operates simply by means of a float actuating a powerful magnet inside the container which in turn provides an invisible "magnetic coupling", through a solid head, with the magnet on the pointer in the dial chamber. Thus the gauge head completely seals off the liquid in the container so the dial may be removed and replaced quickly anytime without loss of liquid.

Materials of Construction*

Head

Acetal.

Seal

Viton.

Guide Rod

Stainless steel.

Tie Plate

Stainless Steel.

Guide & Bearing Pin

Stainless Steel.

Float

Nitrile Ebonite.

Drive Magnetic

Nylon 12 composite.

Standard Dial

Copolymer, hermetically sealed, gasoline resistant.

Magnetic Holder & Centershaft Holder

Acetal.